


Altuglas® Elit III

ref 143 10020

a **new generation** of cast PMMA sheet for the edge-lit market belows an homogenous and bright illumination of the whole surface of the sheet

Performances

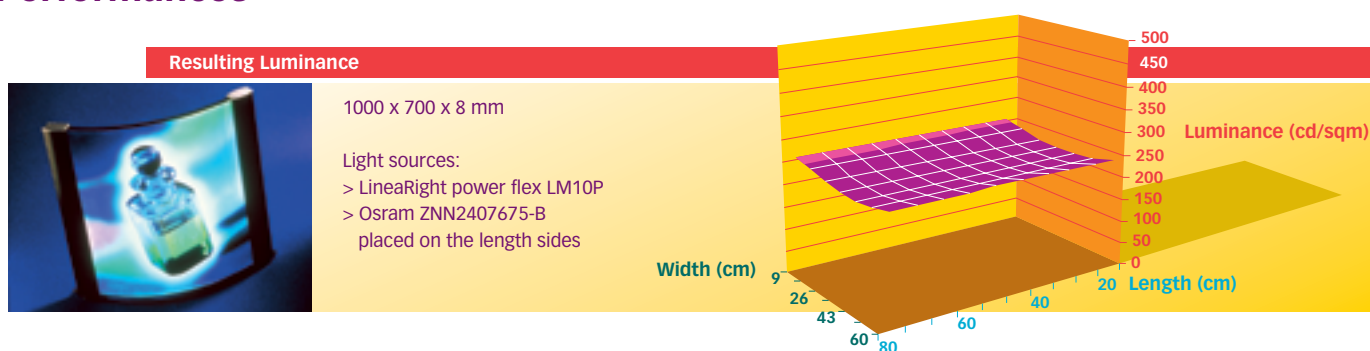

Offers

		Thickness (mm)	Minimum order quantity
Standard	2000 x 1200 mm	12	1
	2500 x 1500 mm	8 10	1
	3050 x 2030 mm	5 8 10	1
On request	2000 x 1200 mm	8 10	14*
		15	13*
	2000 x 1220 mm	3 4 5 6	16*
	2500 x 1500 mm	3 4 5 6	15*
	3050 x 2030 mm	3 4 6 12 15	4*

*Invoiced quantity can reach up to +20% in addition to the ordered quantity

Technical Specifications

	Test Method	Altuglas® Elit III
Density	ISO 1183	1.19
Elastic modulus	ISO 527	3 300 MPa
Impact strength	ISO 179 - 2D	12 kJ/sqm
Coefficient of linear expansion	EN 2155 - 1	0.065 mm/m/C°
Bending temperature		160 - 190°C

www.altuglas-online.com

www.altuglas.com

